
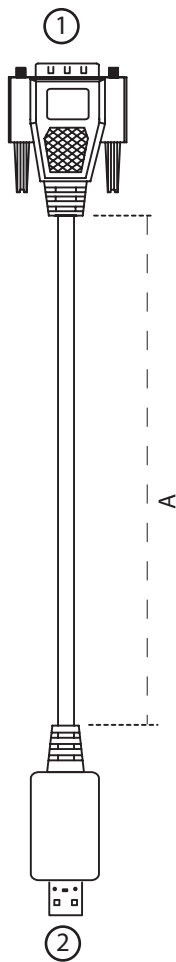


This converter converts RS232 to USB virtual com port. It uses Silicon Labs CP210x USB to UART bridge chipset and requires a driver for its operation. Drivers are available for major operating systems.



Note: Items marked with ** are considered special orders (minimum order required or extra charge will apply)

Part Number Assembly	Id	Model
	SU	100
DB9 End	RS232	
USB End Emulation	Virtual Com Port	
RS232 Baud Rate	Up to 256000 bps	
Indicators	Power LED (optional) **	
Enclosure	ABS Black	
Dimensions	(A) 60in [1524mm]	
Power	USB powered, no external power supply	
Host	PC, MAC and Linux compliant	
DB9 Connection	Converter RS232 pins 2(RX) _____ 3(TX) _____ 5(GND) _____ 9(+5v) _____ <div style="text-align: center; margin-top: 5px;">  </div>	Your device RS232 pins TX RX GND Pin 9
DB9 Connection	<div style="text-align: center; margin-top: 5px;"> <small>RS232 Power</small> </div>	
Drawing Legend	① DB9 male connector (RS232) ② USB port (emulating Keyboard or COM port)	